

6N4-2A-4

Datasheet

FULBAT™
MOTORCYCLE BATTERY



DRY



Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, Dry battery must be activated before the first use and must be checked periodically.

Dry construction, no maintenance is necessary during a long period of storage.

FEATURES

- Dry charged construction
- Activation before first use
- Periodically maintenance and refilled if necessary
- Upright installation only
- 6V and 12V batteries
- Regular life duration
- Unlimited shelf life

TERMINAL


Front	Side	Top	3D
-	-	-	-

SPECIFICATIONS


Voltage	Capacity	CCA (EN)
6V	4.2 Ah (20hr)	25 A
	4.0 Ah (10hr)	

DIMENSIONS & WEIGHT


Length	71±2mm
Width	71±2mm
Total Height	96±2mm
Gross weight	0.92kg

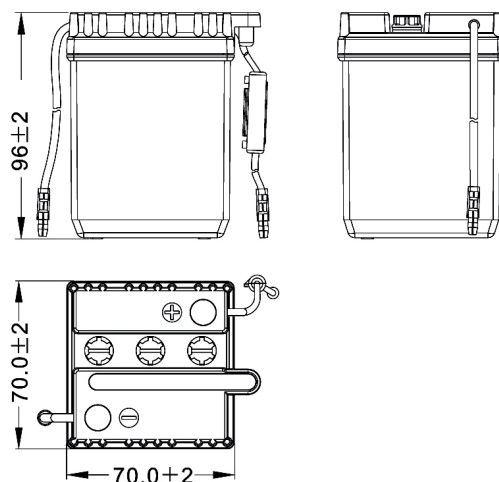

POLARITY



MOUNTING ANGLES



APPLICATIONS



Motorcycle



Scooter