

6N4B-2A

Datasheet

FULBAT™
MOTORCYCLE BATTERY



+
- **DRY**



Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, Dry battery must be activated before the first use and must be checked periodically.

Dry construction, no maintenance is necessary during a long period of storage.

FEATURES

- Dry charged construction
- Activation before first use
- Periodically maintenance and refilled if necessary
- Upright installation only
- 6V and 12V batteries
- Regular life duration
- Unlimited shelf life

TERMINAL


Front	Side	Top	3D
-	-	-	-

SPECIFICATIONS

Voltage	Capacity	CCA (EN)
6V	4.2 Ah (20hr)	35 A
	4.0 Ah (10hr)	

DIMENSIONS & WEIGHT


Length	102±2mm
Width	48±2mm
Total Height	96±2mm
Gross weight	0.93kg

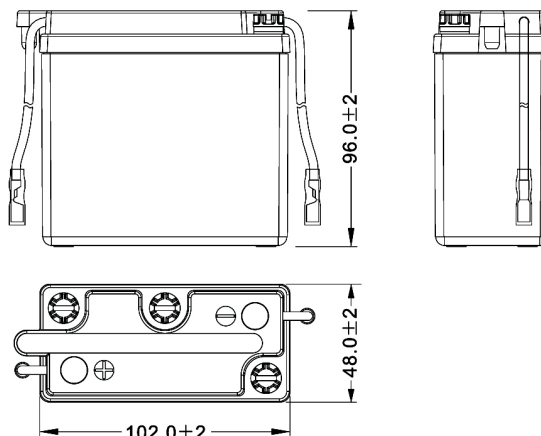

POLARITY



MOUNTING ANGLES



APPLICATIONS



Motorcycle



Scooter