

# 8A4D

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	210 Ah
Capacity at C/20	198 Ah
Capacity at C/5	164 Ah
Weight	133.5 lbs. (61 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle Float	13.8 - 14.6 volts 13.4 - 13.6 volts
Vent	Self-sealing
Terminal	S (SAE)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

## Valve-Regulated, Absorbed Glass Mat Technology




## DIMENSIONS

*Inches (mm)*

Length	21.15 (537 mm) <i>Including handles</i>
Width	8.41 (214 mm)
Height	9.83 (250 mm) <i>Including terminal</i>

AGM Cycle Life vs. Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

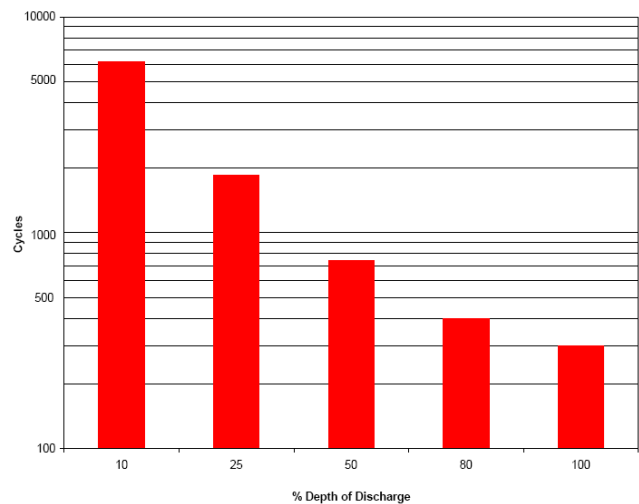

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

