Power your life

Maintenance Free Motorcycle Batteries

WTZ8VIS

Specifications

Nominal Voltage(V)

12V

Nominal Capacity

10 hour rate	(0.7A	to	10.50V)	7Ah
5 hour rate	(1.19A	to	10.20V)	5.95Ah
1 C	(7A	to	9.60V)	3.15Ah
3 C	(21A	to	9.60V)	2.45Ah

Weight

Approx. 2.64kg(5.81Lbs.)

Internal Resistance (at 1KHz)

Approx. 11.5 mΩ

Cold Cranking Amperes (-17.8℃)

120A

High rate discharge characteristics (-10℃)

Discharge current (A)	50A
Duration (min)	2.4min
5 second voltage (V)	9.4V

Operating Temperature Range

Charge	-15℃(5℉)	to	40℃(104℉)
Discharge	-15℃(5℉)	to	50℃(122℉)
Storage	-15℃(5℉)	to	40℃(104℉)

Charge Retention (shelf life) at 20℃(68℉)

1 month	92%
3 month	90%
6 month	80%

Case Material

PP

Terminal Shape

Front	Side	Top
		

Dimensions

Length (L)	113±1 (4.45±0.04)
Width (W)	70±1 (2.76±0.04)
Height (H)	130±1 (5.12±0.04)
Overall Height (HT)	130±1 (5.12±0.04)

mm(inch)

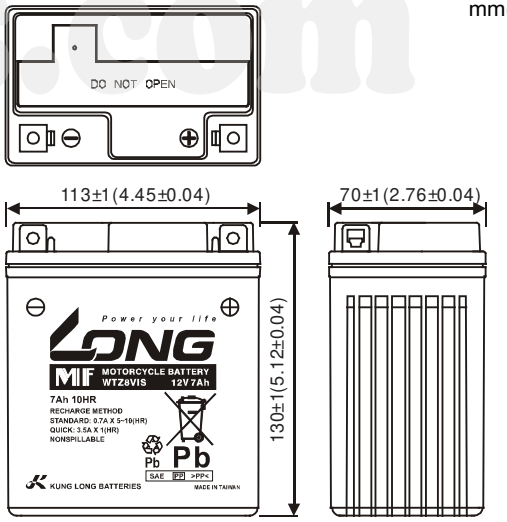

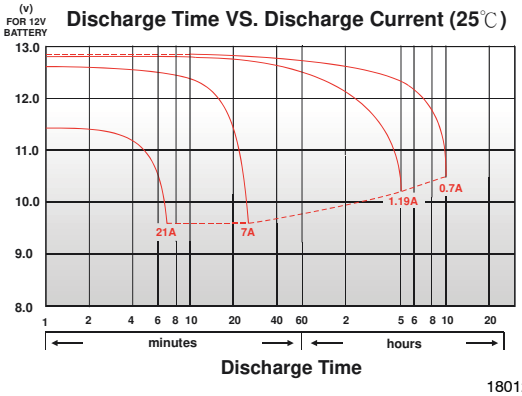

180121-1D

baterias.com

廣隆光電科技股份有限公司
KUNG LONG BATTERIES INDUSTRIAL CO., LTD.

Head Quarter Service TEL: +886-49-2254-777 FAX: +886-49-2255-139 E-mail: sales@mail.klb.com.tw
USA Customer Service TEL: +1-949-328-7936 FAX: +1-949-266-9917 E-mail: sales@kunglong.com
Vietnam Customer Service TEL: +84-272-3779666 FAX: +84-272-3779476 E-mail: sales@mail.klb.com.tw

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.