



ES12-12SA

SPECIFICATIONS

Nominal Voltage (V) 12V

Nominal Capacity

| | |
|----------------------------------|--------|
| 20 hour rate (0.6A to 10.50V) | 12Ah |
| 10 hour rate (1.14A to 10.50V) | 11.4Ah |
| 5 hour rate (2.04A to 10.20V) | 10.2Ah |
| 1C (12A to 9.60V) | 6.4Ah |
| 3C (36A to 9.60V) | 4.20Ah |

Weight Approx. 8.03Lbs. (3.65kg)

Internal Resistance (at 1KHz) Approx. 13 mΩ

Maximum Discharge Current for 5 seconds : 180A

Operating Temperature Range

| | |
|-----------|--------------------------------|
| Charge | -15°C (5°F) to 40°C (104°F) |
| Discharge | -15°C (5°F) to 50°C (122°F) |
| Storage | -15°C (5°F) to 40°C (104°F) |

Charge Retention (shelf life) at 20°C (68°F)

| | |
|----------|-----|
| 1 month | 92% |
| 3 months | 90% |
| 6 months | 80% |

Charging Methods at 25°C (77°F)

Cycle Use : Charging Voltage 14.4 to 15.0V
 Maximum Charging Current : 3.6A
 Coefficient -5.0mv / °C / cell

Standby Use : Float Charging Voltage 13.50 to 13.80V
 Coefficient -3.0mv / °C / cell


Case Material : ABS
 (Option : UL94 HB Flame Retardant Case Material)

Terminal : F2



Maintenance-Free Rechargeable Sealed Lead-Acid Battery



DIMENSIONS



F2 (Faston Tab 250)

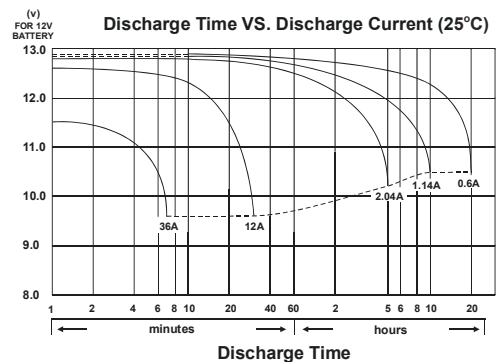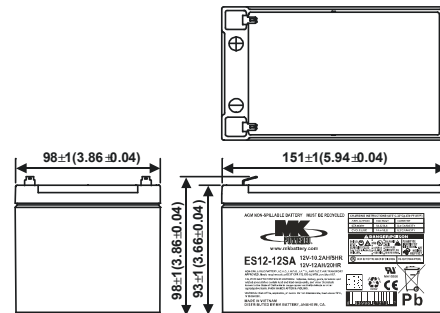

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

