



ES12-6 T2

SPECIFICATIONS

Nominal Voltage (V) 6V

Nominal Capacity

20 hour rate (0.6A to 5.25V)	12Ah
10 hour rate (1.14A to 5.25V)	11.4Ah
5 hour rate (2.04A to 5.1V)	10.2Ah
1C (12A to 4.80V)	6.8Ah
3C (36A to 4.80V)	4.8Ah

Weight Approx. 4.05Lbs. (1.84kg)

Internal Resistance (at 1KHz) Approx. 6 mΩ

Maximum Discharge Current for 5 seconds : 180A

Operating Temperature Range

Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 months	90%
6 months	80%

Charging Methods at 25°C (77°F)

Cycle Use : Charging Voltage 7.20 to 7.50V
Coefficient -5.0mv / °C / cell
Maximum Charging Current : 3.6A

Standby Use : Float Charging Voltage 6.75 to 6.90V
Coefficient -3.0mv / °C / cell


Case Material : ABS UL94 HB

Terminal : F2



Maintenance-Free Rechargeable Sealed Lead-Acid Battery



DIMENSIONS



F2 (Faston Tab 250)

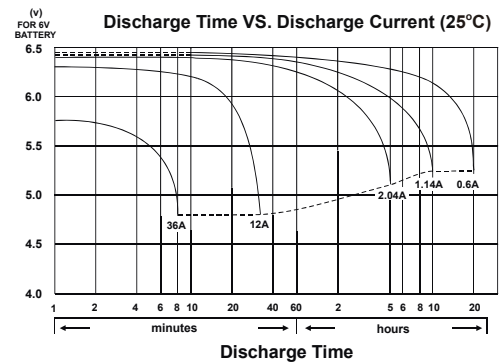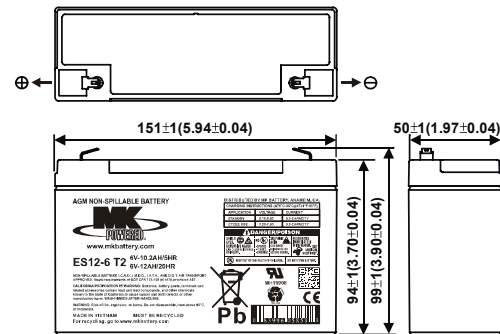

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

