

M22NF-HC

SPECIFICATIONS

| | |
|------------------------------|--|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 51.2 Ah |
| Capacity at C/20 | 48.4 Ah |
| Capacity at C/5 | 41.7 Ah |
| Weight | 40 lbs. (18 kg) |
| Plate Alloy | Lead Calcium |
| Posts | Epoxy Threaded Insert |
| Container/Cover | Flame Retardant Polypropylene UL 94 V-0/>28% L.O.I. |
| Operating Temperature Range | -40°F (-40°C) - 104°F (40°C) |
| Charge Voltage @ 77°F (25°C) | |
| Cycle Float | 13.8 - 14.6 volts 13.4 - 13.6 volts |
| Vent | Self-sealing |
| Terminal | Threaded Insert |



Rated non-spillable by ICAO, IATA and DOT

Made in USA with U.S. and Imported Materials

Valve-Regulated High Compression AGM




DIMENSIONS

Inches (mm)

| | |
|--------|--|
| Length | 8.99 (228 mm) |
| Width | 5.47 (139 mm) |
| Height | 8.27 (210 mm) <i>Including terminal</i> |

Cycle Life vs Depth of Discharge at +25°C (77°F) Based on BCI 2-hour Capacity

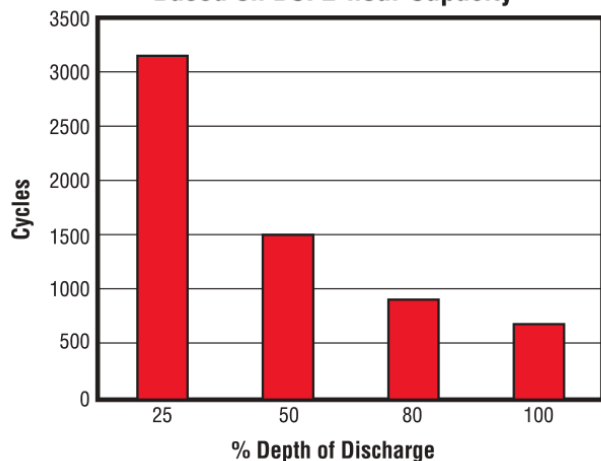

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

