

8A8D

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	250 Ah
Capacity at C/20	245 Ah
Capacity at C/5	197 Ah
Weight	163 lbs. (74 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle Float	13.8 - 14.6 volts 13.4 - 13.6 volts
Vent	Self-sealing
Terminal	S (SAE)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology




DIMENSIONS

Inches (mm)

Length	20.87 (530 mm) Including handles
Width	10.97 (279 mm)
Height	9.62 (244 mm) Including terminal

AGM Cycle Life vs. Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

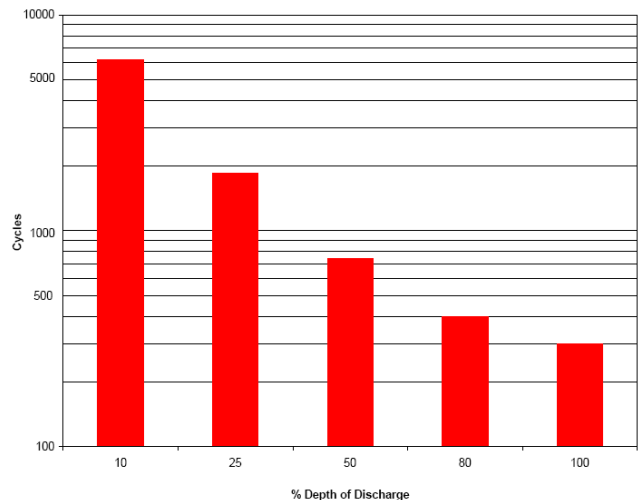

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

