M22NF SLD A

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	63Ah
Capacity at C/20	55Ah
Capacity at C/5	46.5 Ah
Weight	37 lbs. (17 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)
Charge Voltage @ 77°F (25°C)	
Cycle	13.8 - 14.6 volts
Float	13.4 - 13.6 volts
Vent	Self-sealing
Terminal	G (T881)

Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology

DIMENSIONS

Inches (mm)

Length (mm)	**9.60 (244 mm)** *Including handles*
Width (mm)	**5.47 (139 mm)**
Height (mm)	**9.24 (235 mm)** *Including terminals*

AGM Cycle Life vs Depth of Discharge at +25°C (77°F) Based on BCI 2-hour Capacity

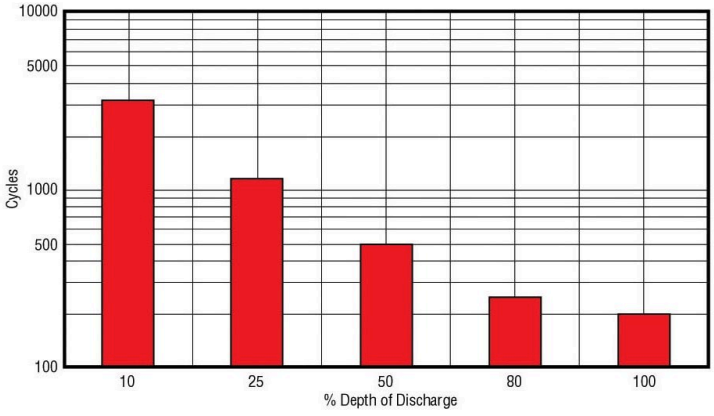

MK Battery

1631 South Sinclair Street ● Anaheim, California 92806

Toll Free: 800-372-9253 ● Fax: 714-937-0818 ● E-mail: sales@mkbattery.com

All data subject to change without notice. No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company. ©2016 MK Battery