



12LSX-7

12V 7 Ah

Design lifetime: 10 years



Q-Batteries 12LSX-7 is an AGM battery with extended design lifetime of 10 years. It is designed for stand-by applications such as emergency-lighting or UPS-systems.

Application:

burglar-systems, UPS-systems,
emergency-lighting-systems



Specification:

Voltage Per Unit	12 V		
Capacity	7 Ah (10 h)		
Cells Per Unit	6		
Weight	2.3 kg +/- 3%		
Max. Discharge Current	115 A (5 sec.)		
Short circuit current	390 A		
Operating Temperature Range	Discharge:	Charge:	Storage:
Normal	- 20°C – 60°C	-10°C – 60°C	- 20°C – 60°C


Self Discharge Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.

Terminal F1

Container Material A.B.S. (UL94-HB)

Dimensions:

151 mm Length x 65 mm Width x 94 (max. 100) mm Height

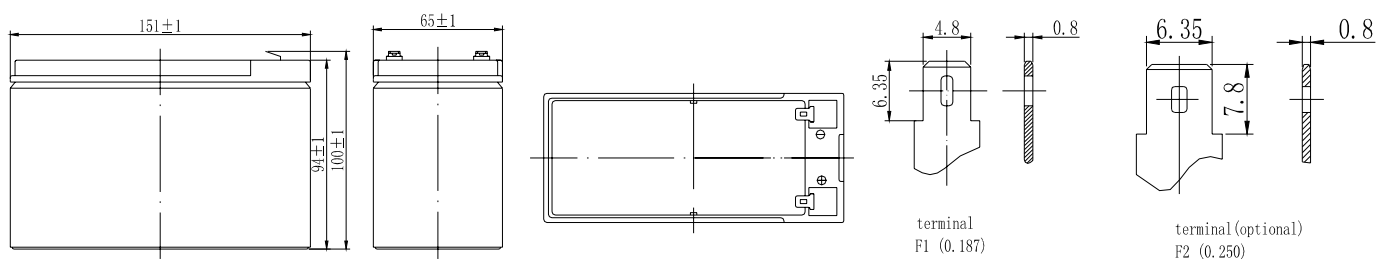


Constant current discharge characteristics: A (25°C)

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60V	29.1	18.4	14.8	8.30	4.56	1.84	1.26	0.70	0.363
1.65V	27.5	17.5	14.2	7.90	4.40	1.80	1.22	0.69	0.359
1.70V	26.0	16.7	13.6	7.62	4.22	1.74	1.17	0.69	0.355
1.75V	24.4	15.7	13.0	7.24	4.04	1.68	1.13	0.68	0.350
1.80V	22.8	14.8	12.4	7.03	3.84	1.63	1.08	0.66	0.344


Constant current discharge characteristics: Watt (25°C)

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	45 MIN	1 HR	2 HR	3 HR	5 HR
1.60V	52.0	35.1	27.5	15.2	11.50	8.97	5.06	3.59	2.33
1.65V	49.4	33.3	26.5	14.6	11.00	8.59	4.94	3.50	2.29
1.70V	46.9	31.6	25.4	14.0	10.50	8.23	4.80	3.40	2.25
1.75V	44.5	29.8	24.3	13.4	10.10	7.99	4.65	3.30	2.21
1.80V	41.6	28.0	23.3	12.9	9.75	7.62	4.50	3.19	2.15

Storage characteristic:

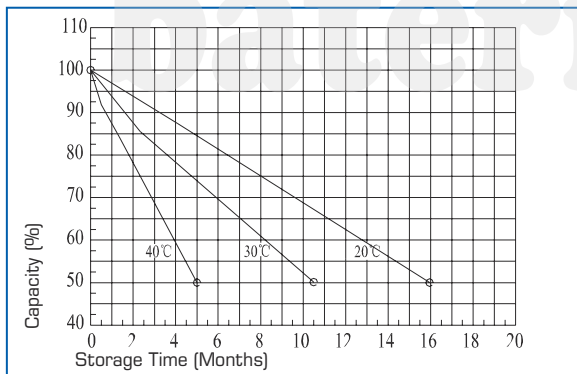

Capacity Factors with different Temperature:

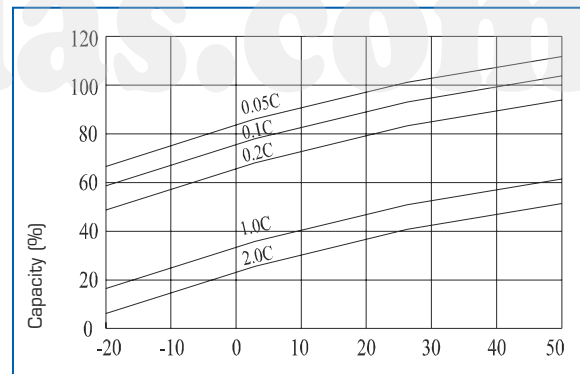

Charging Method:

Charge the batteries at least once every six months, if they are stored at 25°C

Constant Voltage (V)
 -0.2C x 2h + 2.4-2.45V/Cell x 24h, max. Current 0.3CA

Constant Current (A)
 -0.2C x 2h + 0.1CA x 12h

Fast
 -0.2C x 2h + 0.3CA x 4.0h