



DC79-12

79AH@20HR

12-Volt

DEEP CYCLE

Maintenance-Free
Sealed AGM Battery

Nominal Specifications

Battery Model	DC79-12	Rated Capacity	79AH/20HR
Mechanical Specifications			
Group Size	27		
Overall Height (H)	215±2mm	8.46"	
Container Height (h)	211±2mm	8.31"	
Length	307±2mm	12.09"	
Width	169±2mm	6.65"	
Weight	Approx.26.0kg	57.32lbs.	
Terminal Type	M6- Button Terminal		
Terminal Torque	5.6-7.9 N.m		
Container Material	ABS: Standard (UL 94-HB)		

Temperature Range Specifications

Operating Temperature Range	Discharge : -15°C ~+ 50°C (5°F~122°F)
	Charge: -15°C ~ +40°C (5°F~104°F)
	Storage: -15°C ~ +40°C (5°F~104°F)
Recommended Operating Temperature Range	+74°F (23°C) to +80°F (27°C)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, For higher temperatures the time interval will be shorter.




Electrical Specifications

C100	87AH
C20	79AH
C10	75AH
C5	64 AH
CCA	600A
CA or MCA	710A
HPCA	850A
Max. Discharge Current	1000A (5s)
Internal Resistance	5.5mΩ
Reserve Capacity	
Reserve @25 AMPS	125 Minutes
Reserve @75 AMPS	31 Minutes


Charge Voltages

Float Charging Voltage	13.5 to 13.8 VDC/unit@ (25°C)	
Equalization and Cycle Service Charging Voltage	14.3 to 14.5 VDC/unit @ (25°C)	
Maximum Charge Current(A)	22.5A	
Charging Temperature Compensation	Cycle use	-4mV/cell/°C
	Float use	-3mV/cell/°C

BATTERY & TERMINAL DIMENSIONS (All units shown in mm)

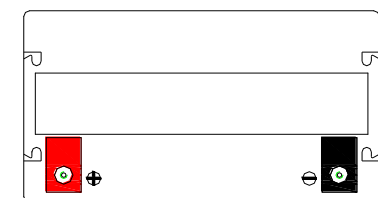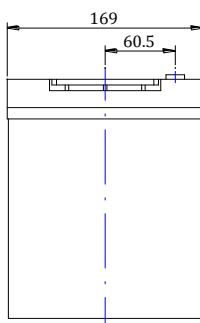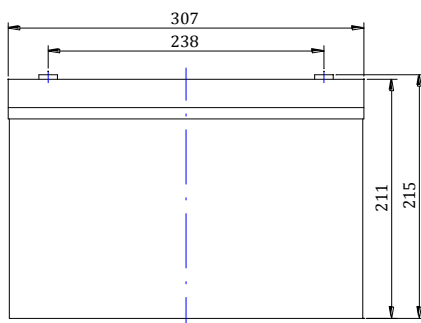

Battery bank spacing required 12.5mm (1/2"inch) minimum

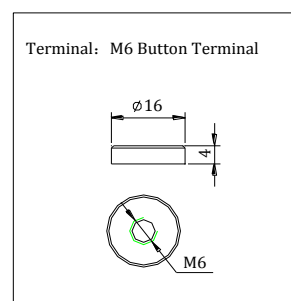

Constant Current Discharge Rating Amperes @ 77°F (25°C)


Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H
1.75V	120	74	54	44.9	23.8	18.2	13.5	8.8	7.5	6.4	3.95

Note The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.




DC79-12 DATA SHEET


Terminal Voltage(V) and Discharge Time

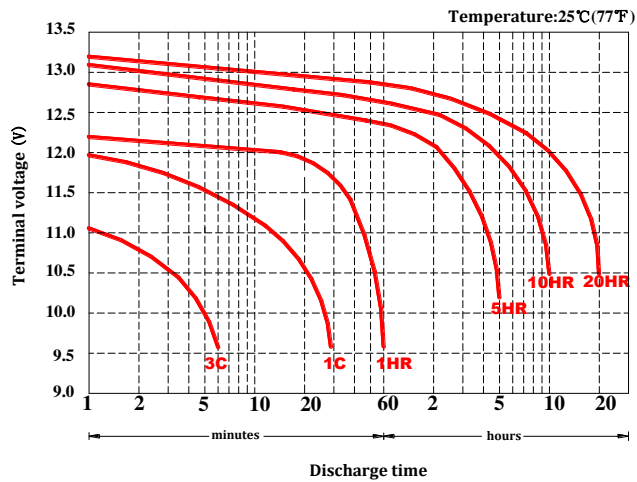


Duration of discharge vs. Discharge current

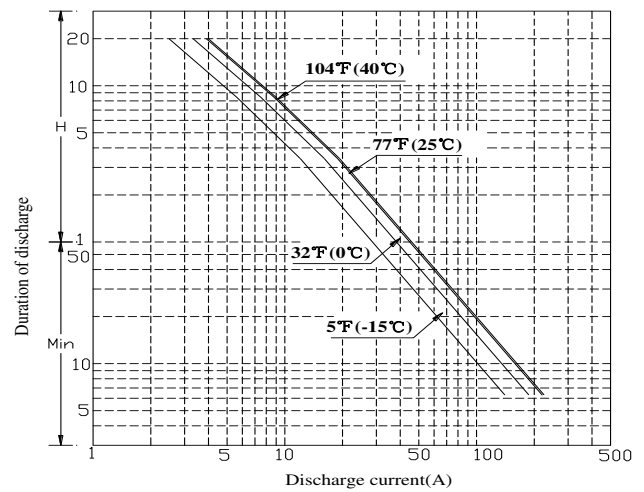


Percent Capacity vs. Temperature

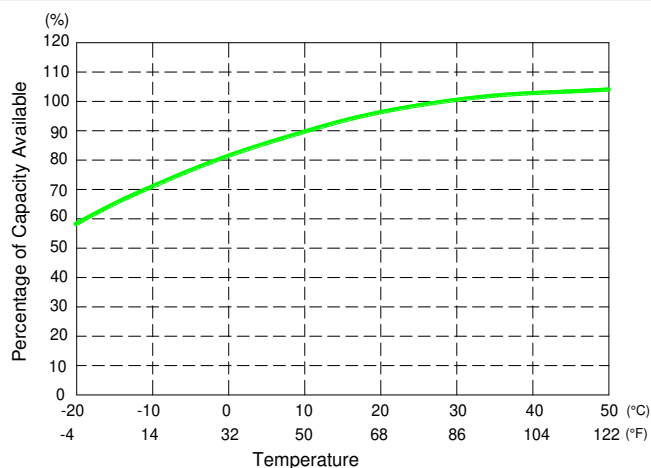

State of Charge(SOC) vs Open Circuit Voltage(OCV)

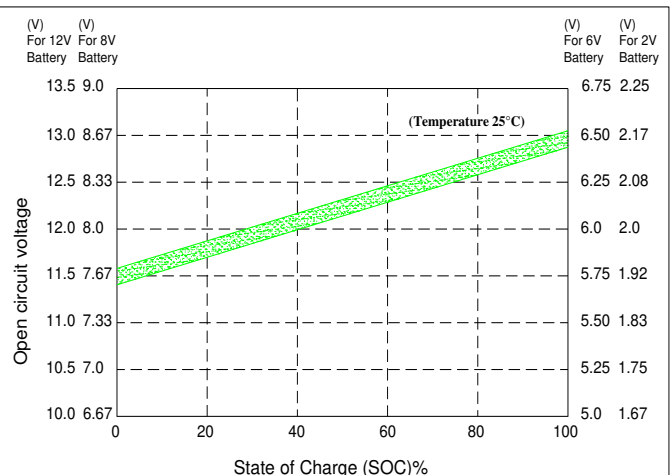

Capacity Retention Characteristic

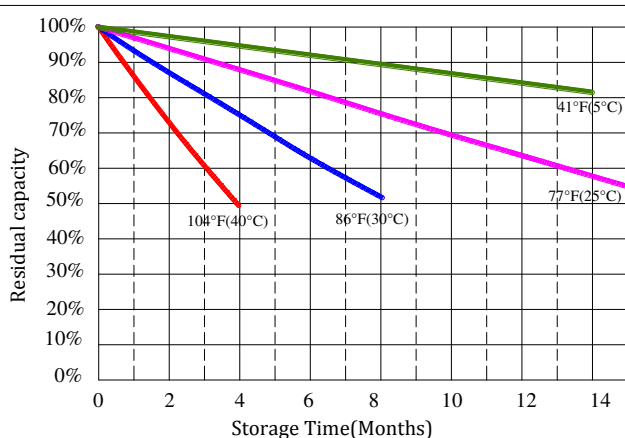

Cycle Life vs. Depth of Discharge(DOD)

