


# 8AGC2

## SPECIFICATIONS

|                              |                                    |
|------------------------------|------------------------------------|
| Nominal Voltage (V)          | 6V                                 |
| Capacity at C/100            | 220 Ah                             |
| Capacity at C/20             | 190 Ah                             |
| Capacity at C/5              | 163 Ah                             |
| Weight                       | 68 lbs. (31 kg)                    |
| Plate Alloy                  | Lead Calcium                       |
| Posts                        | Forged Terminals & Bushings        |
| Container/Cover              | Polypropylene                      |
| Operating Temperature Range  | -40°F (-40°C) - 140°F (60°C)       |
| Charge Voltage @ 77°F (25°C) |                                    |
| Cycle Float                  | 6.9 - 7.3 volts<br>6.7 - 6.8 volts |
| Vent                         | Self-sealing                       |
| Terminal                     | U (SAE/STUD)                       |



Rated UN2794—Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

## Valve-Regulated, Absorbed Glass Mat Technology



## DIMENSIONS


*Inches (mm)*

Length (mm) 10.25 (260 mm)

Width (mm) 7.09 (180 mm)

Height (mm) 10.88 (276 mm)  
*including terminal*

AGM Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity

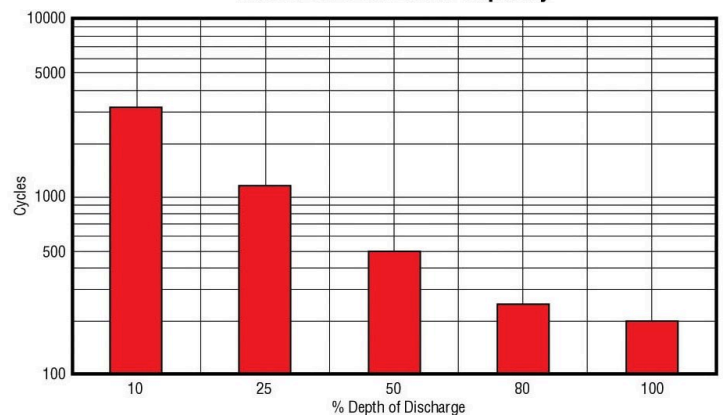

Cycle Chart applies to all MK AGM batteries (except 8AGC2-DEKA cycle chart x 2)

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

