

# M22NF-HC

## SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	51.2 Ah
Capacity at C/20	48.4 Ah
Capacity at C/5	41.7 Ah
Weight	40 lbs. (18 kg)
Plate Alloy	Lead Calcium
Posts	Epoxy Threaded Insert
Container/Cover	Flame Retardant Polypropylene UL 94 V-0/>28% L.O.I.
Operating Temperature Range	-40°F (-40°C) - 104°F (40°C)
Charge Voltage @ 77°F (25°C)	
Cycle Float	13.8 - 14.6 volts 13.4 - 13.6 volts
Vent	Self-sealing
Terminal	Threaded Insert



Rated non-spillable by ICAO, IATA and DOT

Made in USA with U.S. and Imported Materials

## Valve-Regulated High Compression AGM




## DIMENSIONS

*Inches (mm)*

Length	8.99 (228 mm)
Width	5.47 (139 mm)
Height	8.27 (210 mm) <i>Including terminal</i>

## Cycle Life vs Depth of Discharge at +25°C (77°F) Based on BCI 2-hour Capacity

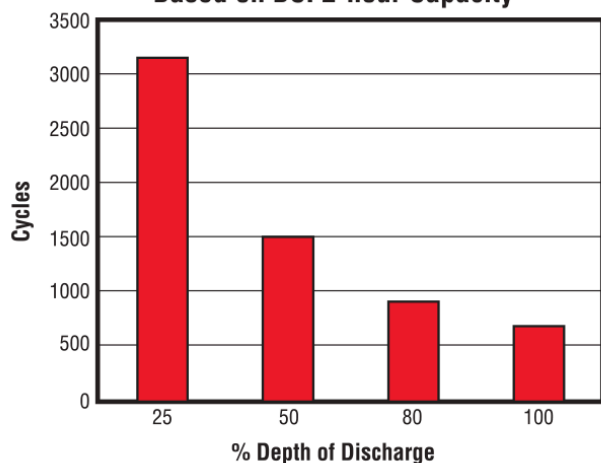

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

