


MOTOBATT

QuadFlex™ Battery
 WWW.MOTOBATT.COM
 MB3U




Brass Terminals (mm)



Terminal Screws: Stainless, M5 Thread
 Fastener: 3mm Allen Hex

Physical Dimensions: (in./mm)

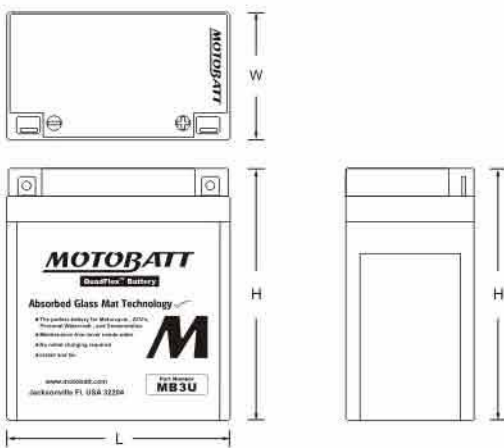

L:3.86(98) W:2.20(56) H:4.33(110)

Tolerances are +/-0.04in.(+/-1mm) and +/-0.08in.(+/-2mm) for height dimensions.

Features

- Patented Quad Terminal Design - Reduce carrying costs
- 12V VRLA Hi Capacity Starting Battery
- Absorbed Glass Mat (AGM) technology
- Brass Terminals - superior conductivity
- US DOT, IATA certified non-spillable
- Highest AH Capacity in the Industry
- Factory Activated-Ready to Install

Performance Specifications

Nominal Voltage	12 volts (6 cells)
Nominal Capacity	
20-hr. (0.19A to 10.50 volts)-----	40AH
10-hr. (0.38A to 10.50 volts)-----	3.8 AH
5-hr. (7.6A to 10.20 volts)-----	3.23 AH
1C. (3.8A to 9.6 volts)-----	3.8 Min (2.40AH)
8C. (30.4A to 6.00 volts)-----	3Min (1.52AH)
Approximate Weight	2.95 lbs. (1.34kg)
Energy Density (20-hr. rate)	1.31W-h/in ³ (79.5 W-h/l)
Specific Energy (20-hr. rate)	16.27W-h/lb (35.8 W-h/kg)
Internal Resistance (approx)	20 milliohms
CCA (-0.4°F/-18°C,7.2V,30S) -----	50 amperes
CA (68°F/20°C,7.2V,30S) -----	90 amperes
Shelf Life (% of nomomal capacityat 68°F (20°C))----	SOC% OCV
1 Months	97% 12.78V
3 Months	91% 12.7V
6 Months	83% 12.5V

Operating Temperature Range

Charge

Discharge

Case

Carton Contents



RETAIL CARTON




SCREW




WRENCH


Shelf life & Storage

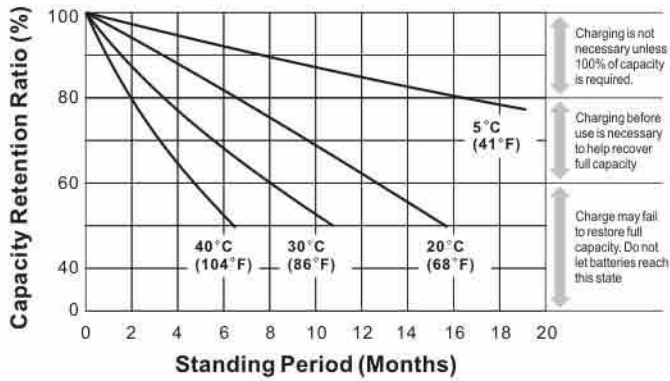


Discharge Characteristics

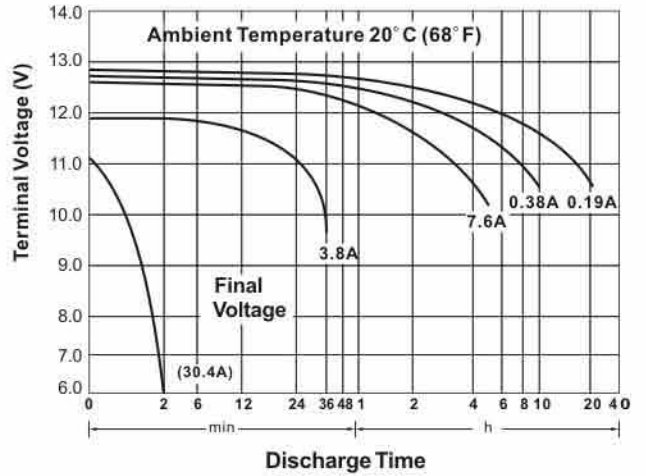

Discharge Time vs. Discharge Current

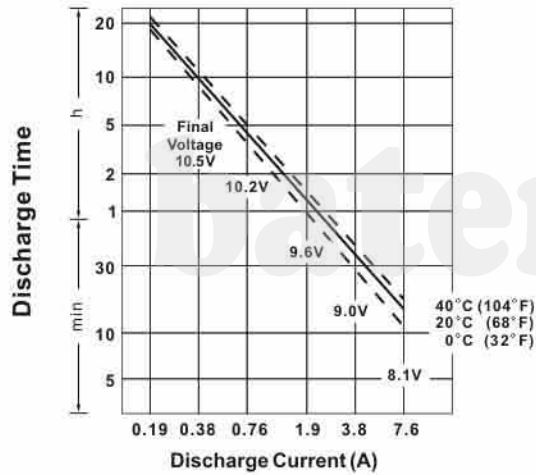

Life Characteristics in Cyclic Use

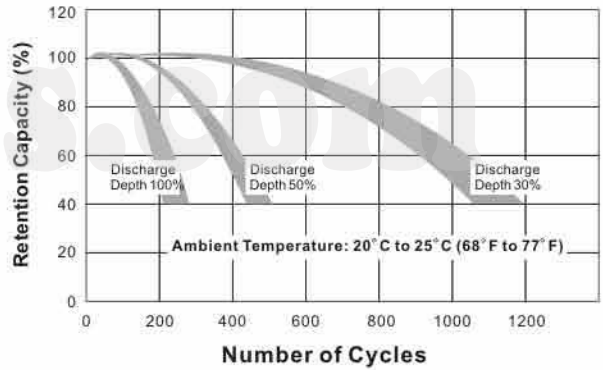

Charging

Cycle Applications: limit initial current to 1.14A. Charge until battery voltage (under charge) reaches 14.8 to 15.0 volts at 68°F (20°C). Hold at 14.8 to 15.0 volts until current drops to under 76mA. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note: Due to the self-discharge characteristics of this type of battery, it is imperative that they be charged within 6 months of storage, otherwise permanent loss of capacity might occur as a result of sulfation.

Chargers

MotoBatt offers a wide range of chargers suitable for batteries up to 750mA. Please refer to the charger selection guide. Please contact our technical department for advice if you have difficulty in locating suitable models or contact us at www.motobatt.com.

Can be used to replace

YB3L-A	YB3L-B		

Further Information

Please refer to our website www.motobatt.com to locate a distributor in your area.