

# ODYSSEY<sup>®</sup> BATTERY

## ODP-AGM24M (ELT-AGM24M)

### Technical Data Sheet

#### Battery Type

AGM with Thin Plate Pure Lead (TPPL). Advanced dual-purpose battery for engine start and deep-cycle use

#### Power & Performance

Voltage	12V
Capacity (20-hour rate)	63Ah
Capacity (10-hour rate)	58Ah
Cold Cranking Amps (CCA, SAE J537)	725A
PHCA - 5-second pulse current	1300A
HCA	950A
MCA	825A
Reserve capacity	155 mins
Short circuit current (using IEC method)	2150A
Internal resistance at 20°C (using IEC method)	4.2 mΩ

#### Dimensions & Weight

Length	277 mm
Width	173 mm
Height (to top of terminals)	224 mm
Height Container	208 mm
Weight	23.3 kg

#### Temperature

Operating Temperature Range	-40°C to +60°C
Optimum Storage Temperature	+20°C

#### Accreditations

The management systems governing the manufacture of this product are ISO 9001 and ISO 14001 certified.

#### Charging & self-discharge

Type of charging curve	IUU
Charge voltage @ +20°C	14.4V to 14.8V
Self-discharge per month at +20°C	1.25%
Self-discharge per month at +40°C	5%

#### Fitting, handling & storage

Can be mounted or stored in any orientation except inverted.  
2-years storage life at +20°C without charging, or until the Open Circuit Voltage (OCV) is <12.6V or <2.10Vpc, whichever occurs first.  
Classified as non-spillable and approved as non-hazardous cargo for ground, sea and air transportation in accordance with the requirements of IMDG (International Maritime code for dangerous Goods) and ICAO (International Civil Aviation Organisation).





#### Terminal Position



+

-

#### Terminal Type

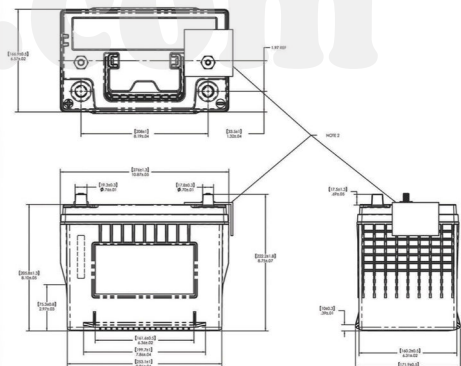

PDF Generated at <https://eu.odysseybattery.com> 17/11/2021 08:26:24  
Information correct at time of exporting PDF. Please check website for updates.



EnerSys World Headquarters  
2366 Bernville Road  
Reading, PA 19605, USA  
Tel: +1-610-208-1991 /  
+1-800-538-3627

EnerSys EMEA  
EH Europe GmbH  
Baarerstrasse 18  
6300 Zug,  
Switzerland

EnerSys Asia  
152 Beach Road  
Gateway East Building #11-08  
Singapore 189721  
Tel: +65 6508 1780