

6N6-3B-1

Datasheet

FULBAT™
MOTORCYCLE BATTERY



DRY



Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, Dry battery must be activated before the first use and must be checked periodically.

Dry construction, no maintenance is necessary during a long period of storage.

FEATURES

- Dry charged construction
- Activation before first use
- Periodically maintenance and refilled if necessary
- Upright installation only
- 6V and 12V batteries
- Regular life duration
- Unlimited shelf life

TERMINAL

Front



Side



Top



3D



SPECIFICATIONS

Voltage

6V

Capacity

6.3 Ah (20hr)

6.0 Ah (10hr)

CCA (EN)

50A

DIMENSIONS & WEIGHT

Length

99±2mm

Width


57±2mm

Total Height

111±2mm

Gross weight


1.26kg

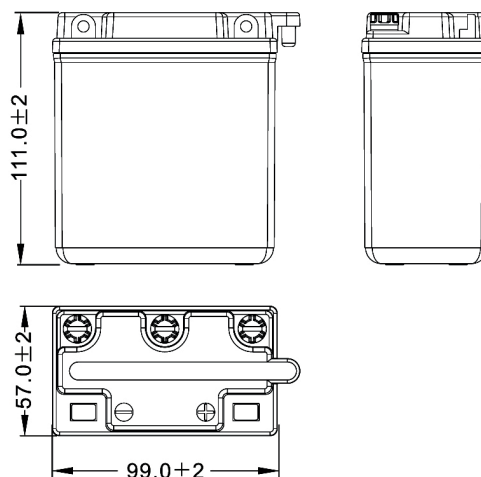

POLARITY



MOUNTING ANGLES



APPLICATIONS



Motorcycle



Scooter



www.fulbat.com

FULBAT™
STARTER BATTERY