



6LS-12

6V 12Ah

VdS G112071

Designlebensdauer 5 Jahre



Q-Batteries Security Akku 6LS-12 is an AGM battery with VdS-approval. It is designed for stand-by applications such as burglar-systems or UPS-systems.

Application:

burglar-systems, UPS-systems,
fire-detecting-systems,
telecommunication-systems







Specification:

Voltage Per Unit	6 V		
Capacity	12 Ah (20 h) cell voltage 1.8V / cell		
Cells Per Unit	6		
Weight	ca. 2 kg +/- 3%		
Max. Discharge Current	180 A (5 sec.)		
Internal Resistance	ca. 15m Ω		
Operating Temperature Range Normal	Discharge: - 15°C - 50°C	Charge: -10°C - 50°C	Storage: - 20°C - 50°C
Operating Temperature Range	25°C \pm 5°C		
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.		
Terminal	F2 (FastOn Terminal 6,35 mm)		
Container Material	A.B.S. (UL94-HB)		

Dimensions:

151 Length x 51 Width x 94 mm (max. 100 mm) Height

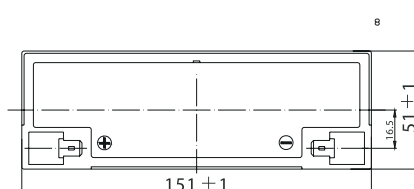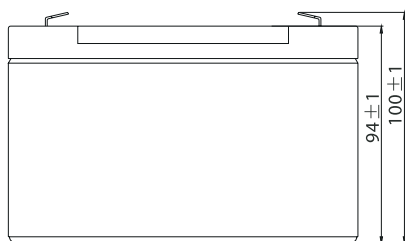


Constant current discharge characteristics: A (25°C)

F.V/Time	5 Min.	10 Min.	15 Min.	20 Min.	30 Min.	45 Min.	1 HR	2 HR	3 HR	4 HR	5 HR	6 HR	8 HR	10 HR	20 HR
1.85 V/cell	22.9	17.5	14.5	12.6	9.72	7.16	6.03	3.57	2.79	2.27	1.85	1.61	1.30	1.08	0.594
1.80 V/cell	30.7	22.4	17.6	14.9	11.5	8.33	6.76	3.90	3.00	2.42	1.99	1.72	1.37	1.12	0.600
1.75 V/cell	34.6	24.6	19.2	16.0	11.9	8.64	7.07	4.04	3.06	2.48	2.04	1.77	1.40	1.15	0.606
1.70 V/cell	38.1	26.9	20.5	16.8	12.4	8.99	7.29	4.14	3.15	2.54	2.09	1.81	1.42	1.17	0.617
1.65 V/cell	42.0	29.0	21.8	17.8	13.1	9.21	7.46	4.20	3.28	2.63	2.15	1.85	1.44	1.19	0.625
160 V/cell	46.3	31.5	23.3	19.0	13.8	9.60	7.54	4.38	3.38	2.71	2.22	1.89	1.45	1.21	0.629

Constant current discharge characteristics: Watt (25°C)

F.V/Time	5 Min.	10 Min.	15 Min.	20 Min.	30 Min.	45 Min.	1 HR	2 HR	3 HR	4 HR	5 HR	6 HR	8 HR	10 HR	20 HR
1.85 V/cell	41.8	32.4	27.1	23.7	18.5	13.8	11.6	6.93	5.44	4.44	3.63	3.16	2.56	2.14	1.18
1.80 V/cell	55.5	40.9	32.3	27.6	21.5	15.9	13.0	7.51	5.82	4.71	3.88	3.37	2.71	2.21	1.19
1.75 V/cell	61.2	44.3	34.9	29.4	22.2	16.3	13.5	7.76	5.91	4.80	3.97	3.46	2.75	2.26	1.20
1.70 V/cell	65.6	47.1	36.7	30.7	22.9	16.9	13.9	7.94	6.06	4.92	4.06	3.52	2.78	2.31	1.22
1.65 V/cell	71.3	50.4	38.7	32.3	24.0	17.2	14.1	8.01	6.29	5.07	4.16	3.59	2.82	2.35	1.23
160 V/cell	76.8	53.5	40.8	34.1	25.2	17.8	14.2	8.31	6.45	5.21	4.28	3.65	2.84	2.37	1.24

Storage characteristic: Charging Method:

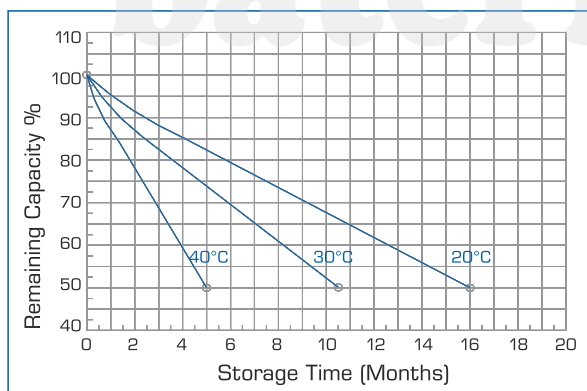

Charge the batteries at least once every six months, if they are stored at 25°C

Constant Voltage (V)
 $-0.2C \times 2h + 2.4-2.45V/Cell \times 24h$, max. Current 0.3CA

Constant Current (A)
 $-0.2C \times 2h + 0.1CA \times 12h$

Fast
 $-0.2C \times 2h + 0.3CA \times 4.0h$

Capacity Factors with different Temperature:

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V & 12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V & 12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%