

# DC200-8 DATA SHEET



## DC200-8

**200AH@20HR**

**8-Volt**

**DEEP CYCLE**

**Maintenance-Free  
Sealed AGM Battery**

### Nominal Specifications

Battery Model	DC200-8	Rated Capacity	200AH/20HR
---------------	---------	----------------	------------

### Mechanical Specifications

Group Size	GC8H	
Overall Height (H)	299±2mm	11.77"
Container Height (h)	295±2mm	11.61"
Length	260±2mm	10.24"
Width	182±2mm	7.17"
Weight	Approx.38.0kg	83.78lbs.
Terminal Type	M8-Button Terminal	
Terminal Torque	9.6-10.7N.m	
Container Material	ABS: Standard (UL 94-HB)	

### Temperature Range Specifications

Operating Temperature Range	Discharge : -15°C ~+ 50°C (5°F ~122°F)
	Charge: -15°C ~ +40°C (5°F ~104°F)
	Storage: -15°C ~ +40°C (5°F ~104°F)
Recommended Operating Temperature Range	+74°F (23°C) to +80°F (27°C)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, For higher temperatures the time interval will be shorter.




### Electrical Specifications

C100	220AH
C20	200AH
C10	180AH
C5	164AH
CCA	1000A
CA or MCA	1200A
HPCA	1430A
Max. Discharge Current	2000A (5s)
Internal Resistance	1.8 mΩ
<b>Reserve Capacity</b>	
Reserve @25 AMPS	390 Minutes
Reserve @56 AMPS	140 Minutes


### Charge Voltages

Float Charging Voltage	9.0 to 9.2 VDC/unit@ (25°C)	
Equalization and Cycle Service Charging Voltage	9.53 to 9.67 VDC/unit @ (25°C)	
Maximum Charge Current(A)	50 A	
Charging Temperature Compensation	Cycle use	-4mV/cell/°C
	Float use	-3mV/cell/°C

### BATTERY & TERMINAL DIMENSIONS (All units shown in mm)

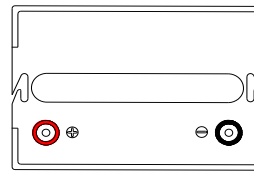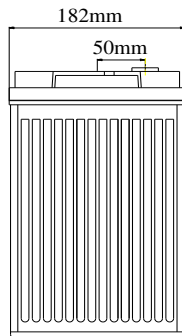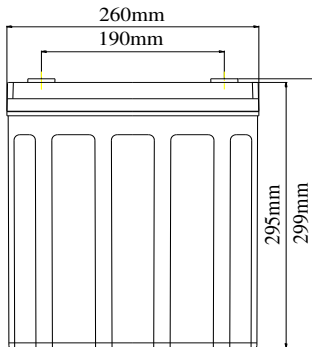

Battery bank spacing required 12.5mm (1/2"inch) minimum

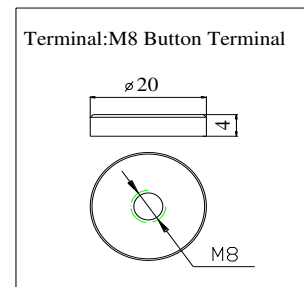

### Constant Current Discharge Rating Amperes @ 77°F (25°C)


Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H
1.75V	290	182	134	110.8	59.6	45.3	31.7	21.8	18.00	15.33	10.00

**Note** The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.




# DC200-8 DATA SHEET


## Terminal Voltage(V) and Discharge Time

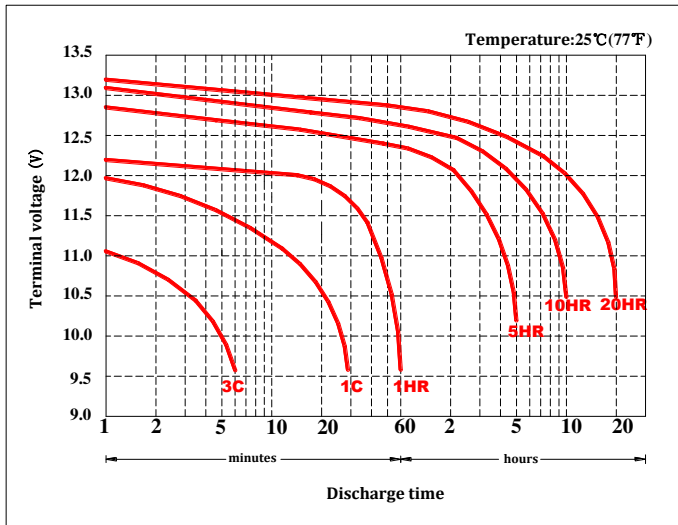


## Duration of discharge vs. Discharge current

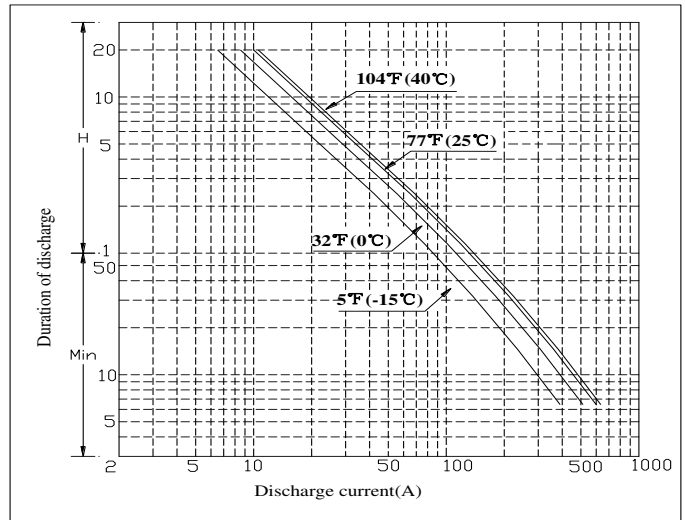


## Percent Capacity vs. Temperature

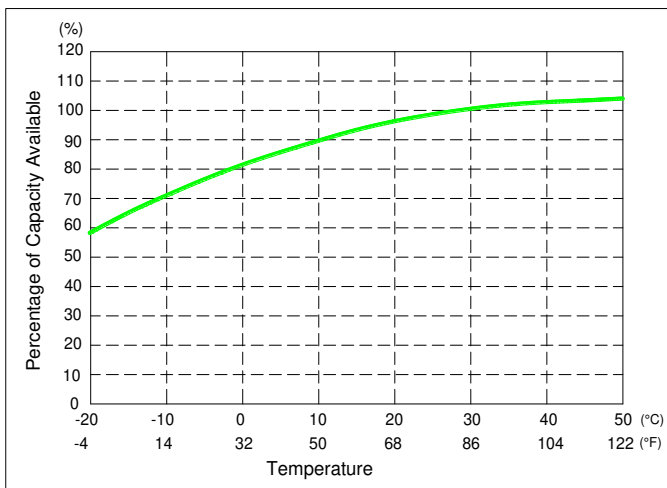

## State of Charge(SOC) vs Open Circuit Voltage(OCV)

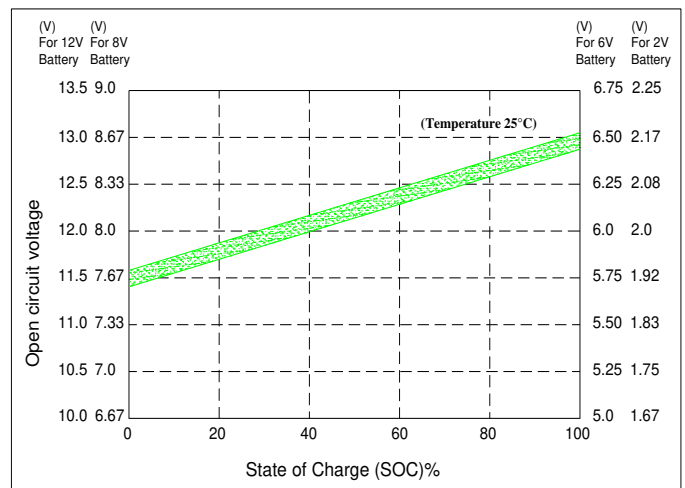

## Capacity Retention Characteristic

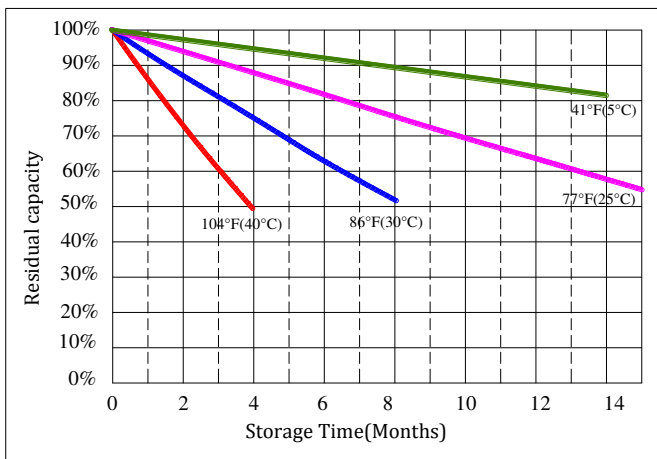

## Cycle Life vs. Depth of Discharge(DOD)

